

NOTE:

1.MATERIAL:

- 1.1 HOUSING: LCP, UL 94V-0 COLOR: BLACK.
- 1.2 CONTACT: C2680, T=0.20mm.
- 1.3 SHIELD: C2680, T=0.40mm.
- 1.4 COVER: LCP,UL 94V-0

2.FINISH:

- 2.1 CONTACT: GOLD(1U") PLATING IN CONTACT AREA, 50u"MIN Tin PLATED IN SOLDER AREA,50u" MIN. NICKEL UNDERPLATED OVERALL.
- 2.2 SHIELD: 50u" MIN. NICKEL UNDERPLATED OVERALL.


3.MECHANICAL CHARACTERISTICS

- 3.1 RATING CURRENT: 0.5A
- 3.2 RATING VOLTAGE: 40V
- 3.3 CONTACT RESISTANCE: 40 mΩ MAX
- 3.4 INSULATION RESISTANCE a, UNMATED: 100MΩ MIN AT 500 VDC b, MATED: 10M OHMS MIN AT 150 VDC
- 3.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/1MINUTE
- 3.6 DURABILITY: 10000 CYCLES.



MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: DP 20P CONN	
		PAR	DP-001-R-J
		DWN	
		CHKD	
		APVD	
DECIMALS:	ANGLES:	SCALE:1:1	UNIT:MM
X.X:±0.25	X.:±1.5'		
X.XX:±0.15	X.X:±1.0'		
X.XXX:±0.10		CUSTOMER COPY	SIZE:A4 SHEET:1F1 REV:A



MAPX	MODIFICATION	DATE	DRAW	APPROVE

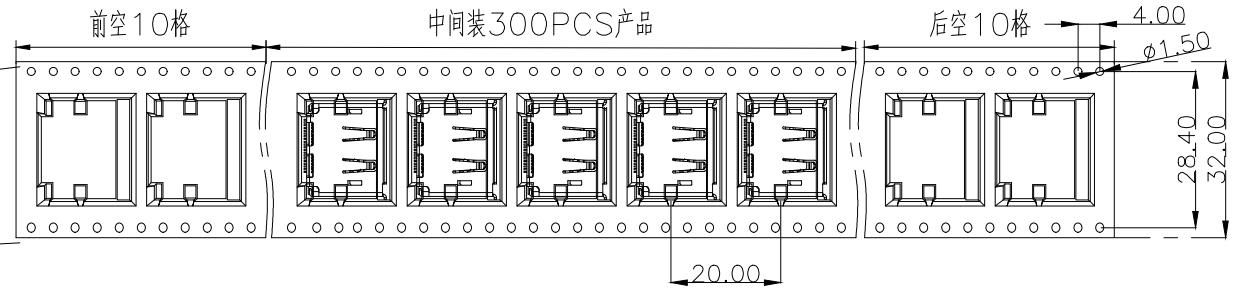

PCS/卷	卷/箱	PCS/箱
300	10	3000

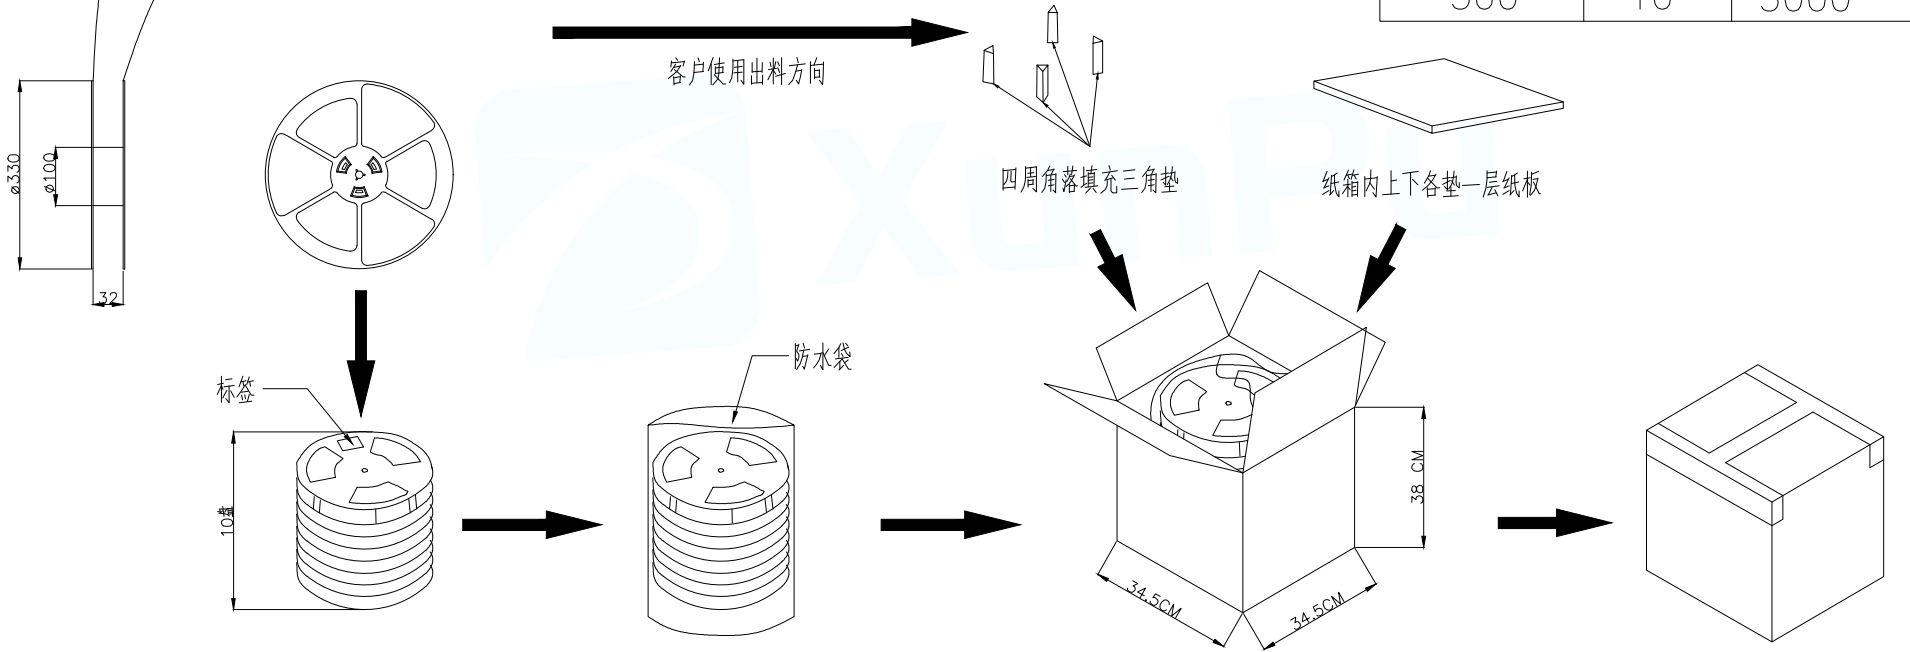

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: DP 20P CONN	
		PAR	DP-001-R-J
		DWN	
		CHKD	
		APVD	
DECIMALS:	ANGLES:	SCALE 1:1	UNIT:MM
X.X:±0.25	X.°:±1.5°		
X.XX:±0.15	X.X:±1.0°		SIZE:A4
X.XXX:±0.10			SHEET:1F1
		CUSTOMER COPY	REV:A