



TRAVEL:FULL:

LED COLOR					
1	2	3	4	5	6
Red/	Yellow	Green	Blue	White	Pure Green


NO LOCK	Normal ON	Push (ON)	
Connecting Terminal	1 – 2 4 – 5	2 – 3 5 – 6	
			

NOTES:





1. RATING: 30VDC 0.1A
2. CONTACT RESISTANCE: 50mΩ Max
3. INSULATION RESISTANCE: 100MΩ 500VDC FOR 1MIN
4. DIELECTRIC STRENGTH: 500VAC (50/60Hz) FOR 1MIN
5. LIFE TEST: 10,000 CYCLES
6. OPERATION FORCE: 250 ± 100 gf
7. TRAVEL: FULL: FULL: 1.6 ± 0.4 mm LOCK: 1.4 ± 0.4 mm

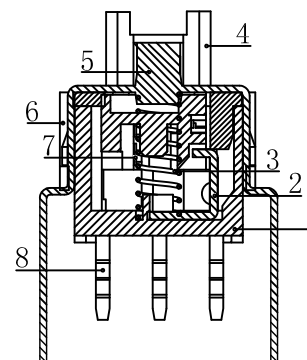

A—A

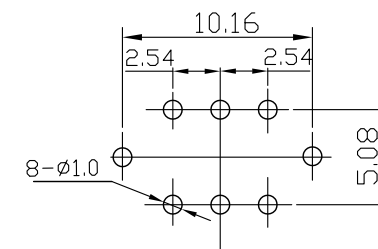

P.C.B LAYOUT

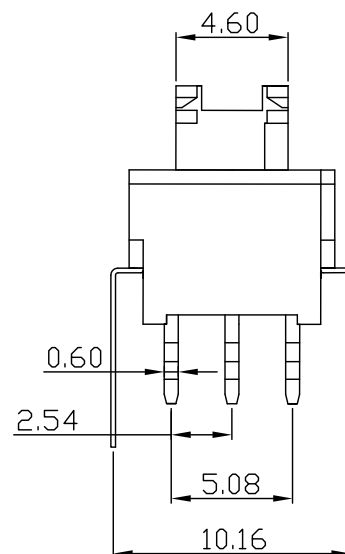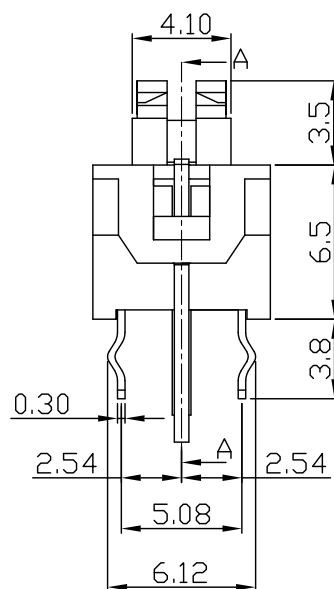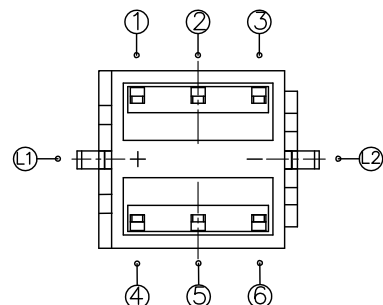

复位无钩针

8	TERMINAL	BRASS/PBT	6	Ag-PLATED	TOLERANCE UNLESS SPECIFIED									
7	SPRING PLATE	PHOSPHOR BRONZE	1											
6	COVER	PA66	1		UP TO 5mm:±0.1	ANGULAR	1							
5	LED	GaAsP/GaP	1		ABOVE 5mm:±0.2	±1°	NO	DATE	REVISIONS			BY	APPD	
4	BUTTON	POM	1		TITLE: PUSH SWITCH				UNIT : MM		ROHS	DWN		
3	SPRING	SUS	1		MODEL: TC-1203LA-R-S-E-01				SCALE: 1:1		COMPLIANT	CHK'D		
2	HOOK PIN	SUS	1		 DONGGUANG HAORY ELECTRONICS CO., LTD 东莞市弘皓电子有限公司						APPD			
1	BASE	PA66	1								PRO.AGL:  		REV : A/C	
NO.	PART NAME	MATERIAL	QTY	FINISHING										