

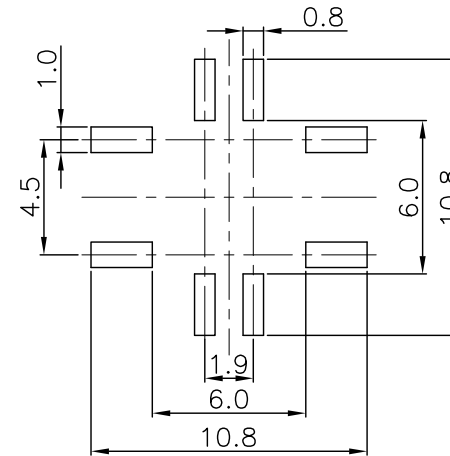
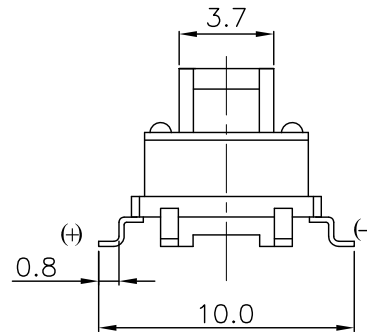
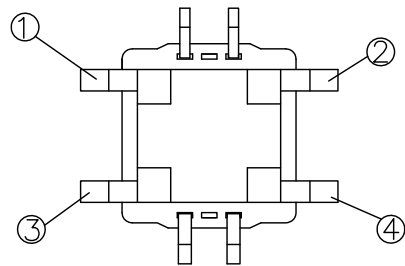
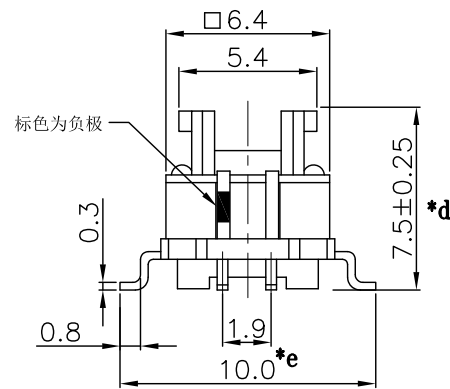


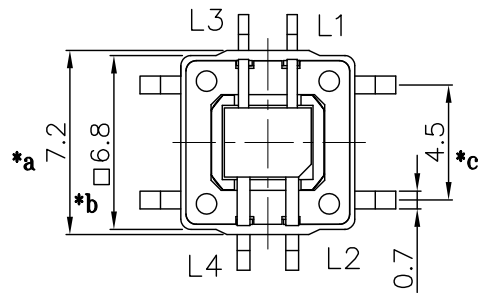

P.C.B LAYOUT

SCHEMATIC



SPECIFICATION

- 1.Rating : DC12V 50mA.
- 2.Contact resistance: $\leq 100m\Omega$.
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V).
- 4.Withstanding voltage: 250VAC .
- 5.Operating Force: $160\pm 50gf/250\pm 80gf$
(依客户需求而定) .
- 6.Travel: $0.25\pm 0.1mm$.
- 7.life test: 100,000 cycles.
- 8.Operation temperature range: $-25^{\circ}C\sim 85^{\circ}C$.

				TOLERANCE UNLESS SPECIFIED							
6	COVER	PPA	1	BLACK	$<1.5: \pm 0.1mm$ $>1.5\sim 5.0: \pm 0.25mm$ $>5.0: \pm 0.3mm$	ANGULAR $\pm 1^{\circ}$	A0	2024.5.31	首次发行	ZLK	
5	TERMINAL	BRASS	4	Ag-PLATED			NO	DATE	REVISIONS	BY	APPD
4	CONTACT	SUS	1	Ag-PLATED	TITLE: TACT SWITCH				UNIT : MM	ROHS	DWN
3	LED	GaAsP/GaP	1		MODEL: TC-1196A-RGB-E-01				SCALE: 1:1	COMPLIANT	CHK'D
2	BUTTON	PPA	1	BLACK	 DONGGUANG HAOYU ELECTRONICS CO., LTD 皓宇 HOOYA 东莞市弘皓电子有限公司				APPD		
1	HOUSING	PPA	1	BLACK					PRO.AGL: 		
NO.	PART	NAME	MATERIAL	QTY	FINISHING					REV :A0	