

1 2 3 4 5 6

A

B

C

D

E

F

A



B

C

D




E

F

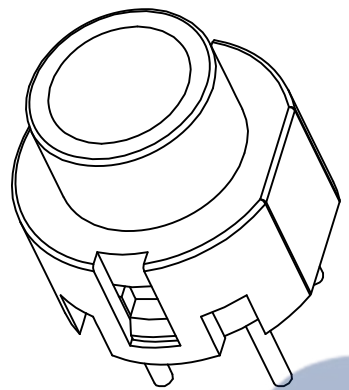
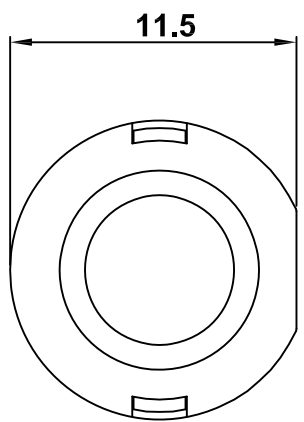


- NOTES:
- 1.CIRCUIT: Push(NO)
 - 2.RATING: 30mA 30VDC;
 - 3.CONTACT RESISTANCE: 100mΩ Max
 - 3.INSULATION RESISTANCE: 100mΩ Min
 - 4.DIELECTRIC STRENGTH: 500VAC for 1 minute
 - 5.LIFE TEST: 50,000 cycles Min
 - 6.OPERATING TEMPERATURE: 10℃~60℃
 - 7.OPERATING FORCE:200±50gf
 - 8.TRAVEL:0.7±0.2mm
 - 9.FUNCTION: OFF-(ON)

电话：0769-82320511-867

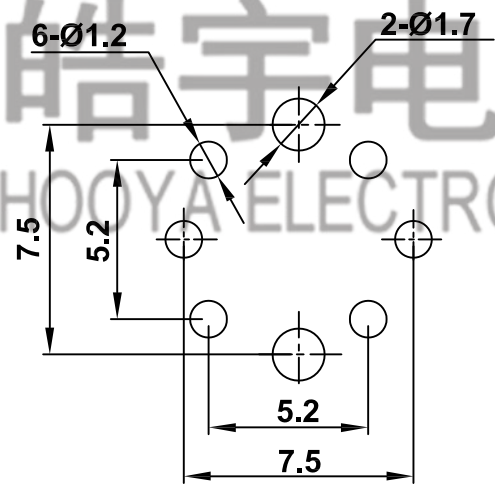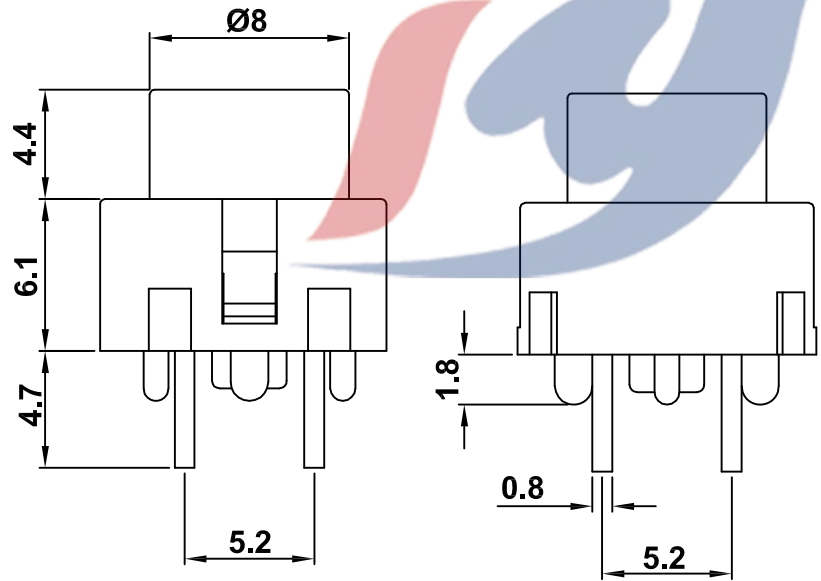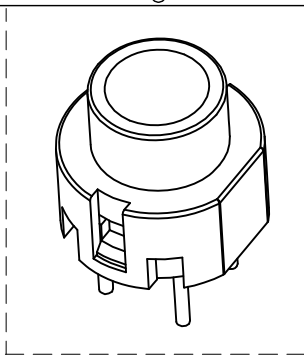

P.C.B LAYOUT



6	SHIM	C5191
5	TERMINAL	BRASS
4	SPRING	SUS
3	BUTTON	ABS
2	CONTACT	SUS
1	BASE	PA66
ITEM PART NAME		MATERIAL

CAP COLOR (X)							
W	B	R	G	U	Y	A	O
White	Black	Red	Green	Blue	Yellow	Gray	Orange

REV.	REVISION RECORD	DATE	REV.	REVISION RECORD	DATE

TOLERANCE			
UNLESS OTHERWISE STATED			
X	±0.30	∠	±2°
X.X	±0.15	REV.	A1
DRAWN	Andy	2018.8.8	
CHK'D	Lau		
APPV'D			
A4	1 OF 1	⊙	⊙

TITLE: PUSH SWITCH	
PART NO.: PB-1198-N-R-01	
MATL.: --	UNIT: mm
FINISH: --	SCALE: --
东莞市弘皓电子有限公司	

1 2 3 4 5 6