
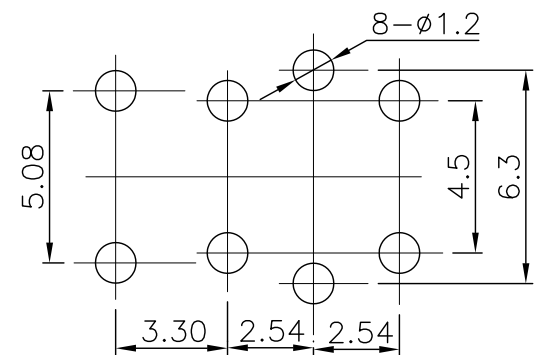
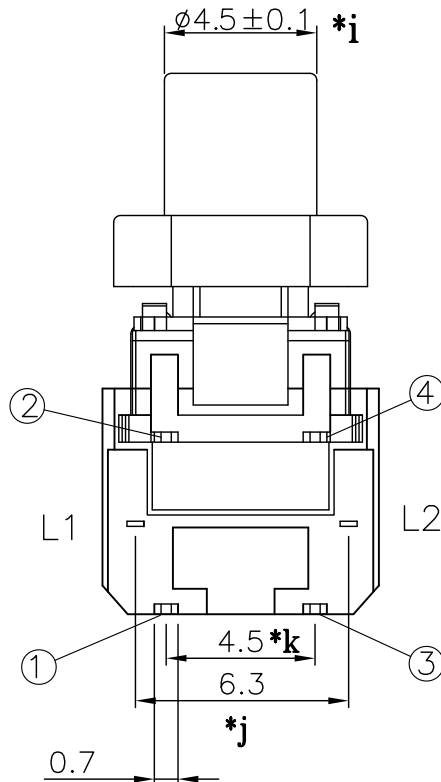
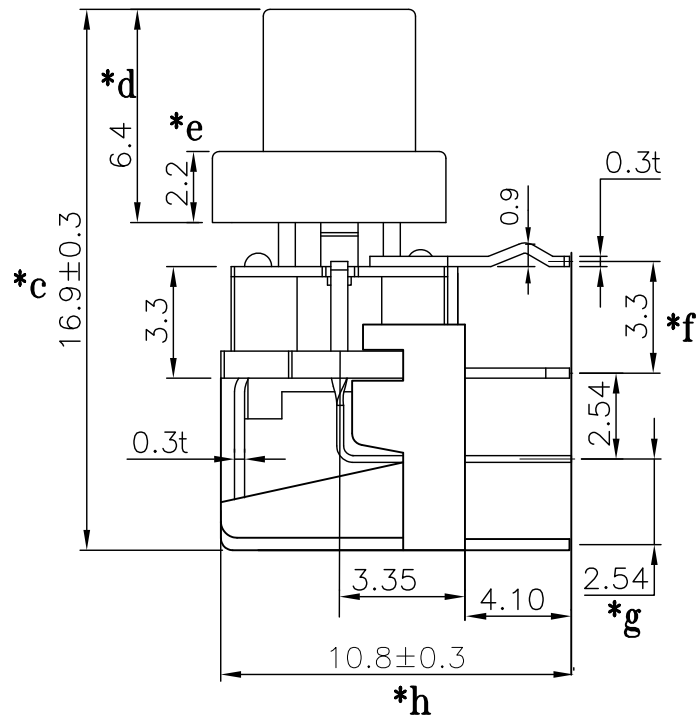


X						
LED COLOR						
1	2	3	4	5	6	7
Red	Yellow	Green	Blue	Yellow Green	Red Green	Red Yellow

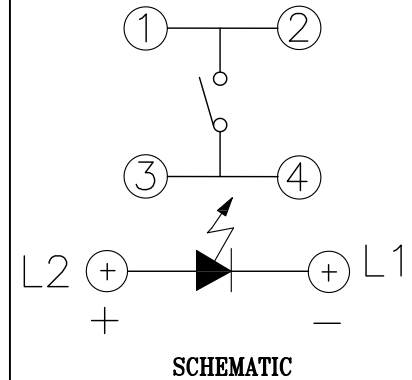

P.C.B Layout

SPECIFICATION

- 1.Rating : DC12V 50mA.
- 2.Contact resistance: $\leq 100m\Omega$.
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V).
- 4.Withstanding voltage: 250VAC .
- 5.Operating Force: 160 $\pm$ 50gf.
- 6.Travel: 0.25 $\pm$ 0.1mm.
- 7.Life test: 10,000 cycles.
- 8.Operation temperature range: -25 $^{\circ}$ C~85 $^{\circ}$ C.

					TOLERANCE UNLESS SPECIFIED							
7	COVER	PC	1									
6	COVER	PET	1		<1.5: ±0.1mm >1.5~5.0: ±0.25mm >5.0: ±0.3mm	ANGULAR ±1°	A0	2024.7.1	首次发行		YKH	
5	TERMINAL	BRASS	4	Ag-PLATED			NO	DATE	REVISIONS		BY	APPD
4	CONTACT	PHOSPHOR BRONZE	1		TITLE: TACT SWITCH			UNIT : MM		ROHS	DWN	
3	LED	GaAsP/GaP	1		MODEL: TC-1193RBD-C8A-01			SCALE: 1:1		COMPLIANT	CHK'D	
2	BUTTON	PA66	1		 DONGGUANG HAOYU ELECTRONICS CO., LTD 东莞市弘皓电子有限公司					APPD		
1	HOUSING	PA66	1									
NO.	PART	NAME		MATERIAL	QTY	FINISHING				PRO.AGL:  		REV :A0