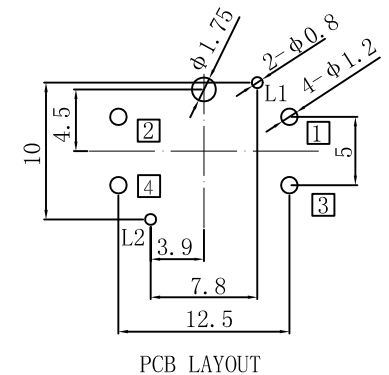

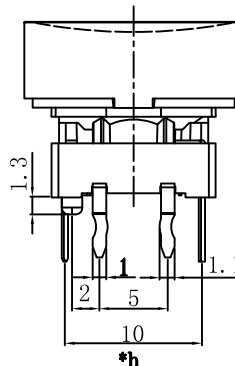
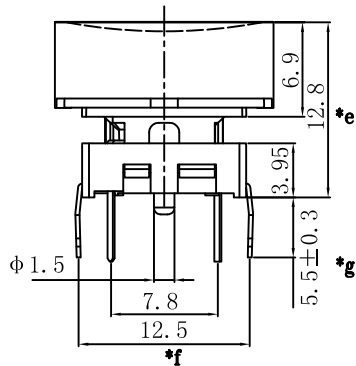

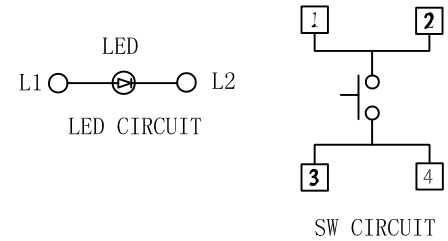

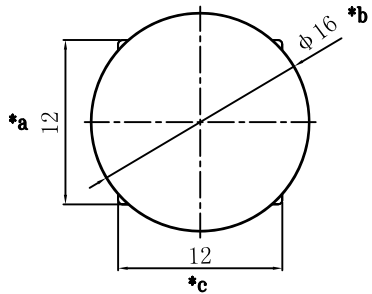


SPECIFICATION

- 1.Rating : DC12V 50mA.
- 2.Contact resistance: $\leq 100\text{m}\Omega$.
- 3.Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V).
- 4.Withstanding voltage: 250VAC .
- 5.Operating Force: $160\pm 50\text{gf}/250\pm 80\text{gf}$ (依客户需求而定) .
- 6.Travel: $0.4\pm 0.15\text{mm}$.
- 7.life test: 10,000 cycles.

LED COLOR								
1	2	3	4	5	6	7	8	9
Red	Blue	Yellow	Green	White	Orange	Red Blue	Red Green	Red White

					TOLERANCE UNLESS SPECIFIED											
7	CAP	PC	1	透明	<1.5: ±0.1mm >1.5~5.0: ±0.25mm >5.0: ±0.3mm	ANGULAR ±1°	A0	2024.8.5	首次发行			BY				
6	LED		1				NO	DATE	REVISIONS			BY	APPD			
5	TERMINAL	BRASS	4	Ag-PLATED												
4	SPRING PLATE	PHOSPHOR BRONZE	1	Ag-PLATED	TITLE: TACT SWITCH				UNIT : MM	ROHS	DWN					
3	BUTTON	PA66	1		MODEL: TC-1194B-G-E-C17B-01				SCALE: 1:1	COMPLIANT	CHK'D					
2	DIFFUSER	PC	1	WHITE	 DONGGUANG HAOYU ELECTRONICS CO., LTD 皓宇 HOOYA 东莞市弘皓电子有限公司								APPD			
1	HOUSING	PA66	1													
NO.	PART	NAME	MATERIAL	QTY	FINISHING									PRO.AGL:		REV :A0