
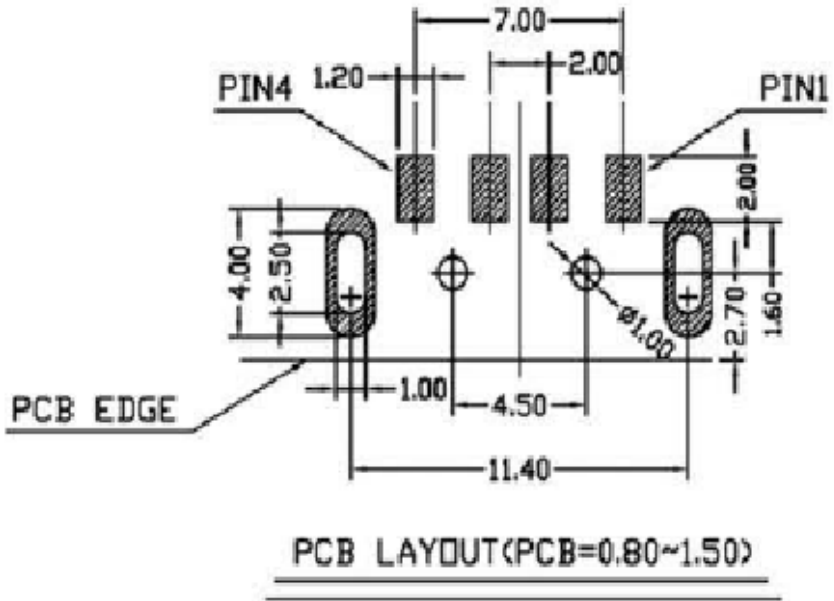
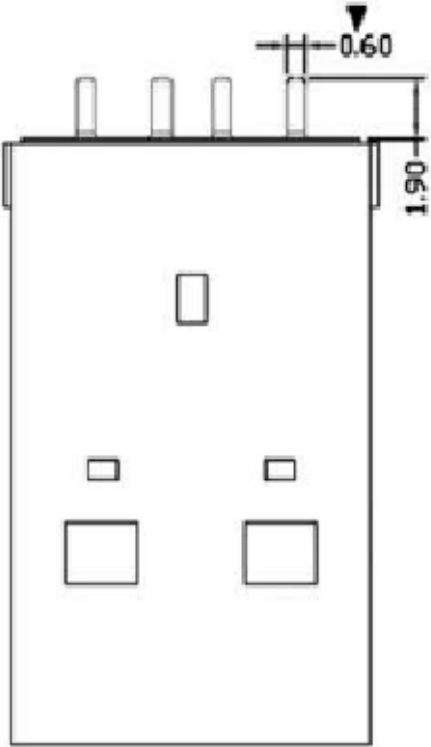
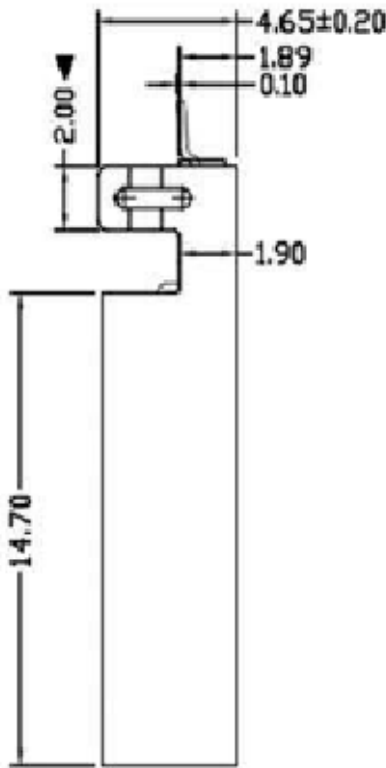


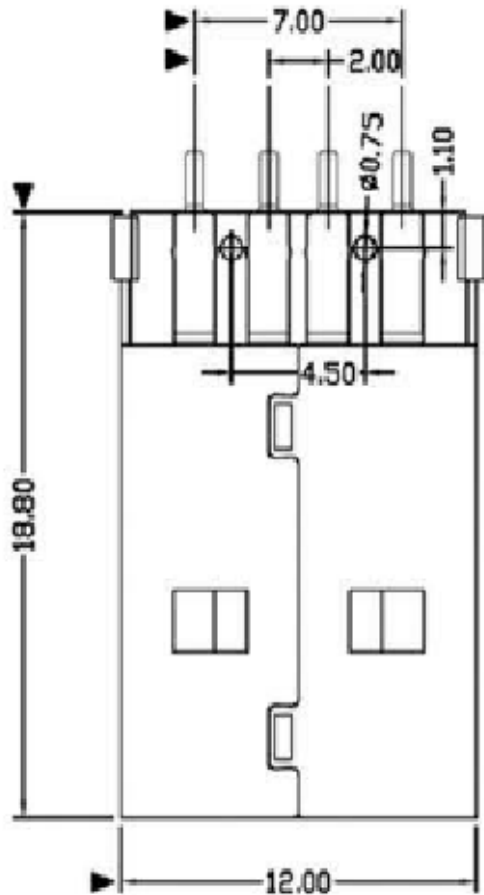

- NOTE:
1. ELECTRICAL CHARACTERISTIC:
1) VOLTAGE CURRENT RATING: 0.5AMP, 100V AC
2) INSULATION RESISTANCE: 100MΩ MIN;
3) CONTACT RESISTANCE: 30mΩ MAX;
4) DIELECTRIC WITHSTANDING VOLTAGE: AC 500V R.M.S.
 2. Mechanical:
1) Mating Force: 35 N MAX
2) Unmating Force: 10 N MIN.
 3. DIMENSIONS MARKED '▼' TO BE CHECKED BY Q.C & IPQC.

Bill of materials:						
3	HOUSING	PA9T+30%GF, UL94 V-0	1	UL 94V-0	X. ±0.3	X. ±2"
					.X ±0.2	.X" ±1"
2	SHELL	SPCC/STEEL	1	PLATED Ni	.XX ±0.15	.XX"
					.XXX ±0.10	.XXX"
1	TERMINAL	COPPER ALLOY (C2680)	4	Gold flash on contact tin on tail		
NO	PARTS	MATERIAL	QTY	FINISHING		